


鎢鋼 4刃 圓鼻 立銑刀

TUNGSTEN CARBIDE 4-FLUTE CORNER RADIUS END MILL



$d \leq 3$ -0.005 ~ -0.028
 $3 < d \leq 6$ -0.015 ~ -0.038
 $6 < d \leq 18$ -0.020 ~ -0.047
 $18 < d$ -0.020 ~ -0.053

- 超細微粒碳化鎢材質
- Micro-Grain Tungsten Carbide

適合材質：


碳素鋼、模具鋼、合金鋼、工具鋼、
不鏽鋼、鑄鐵、熱處理鋼料。

Applicable material:

Carbon steel, mold steel, alloy steel, tool steel,
stainless steel, cast iron, heat-treated steel.

R角結構適合切削高硬度材，刀尖不易崩裂，
並可替代小徑球型銑刀，可作清角和曲面銑削

The R corner configuration is excellent for cutting
high hardness materials without edge collapse.
Also, It's replacable for small radius ball end mill, and
permitting for corner cleaning and curving surface milling.

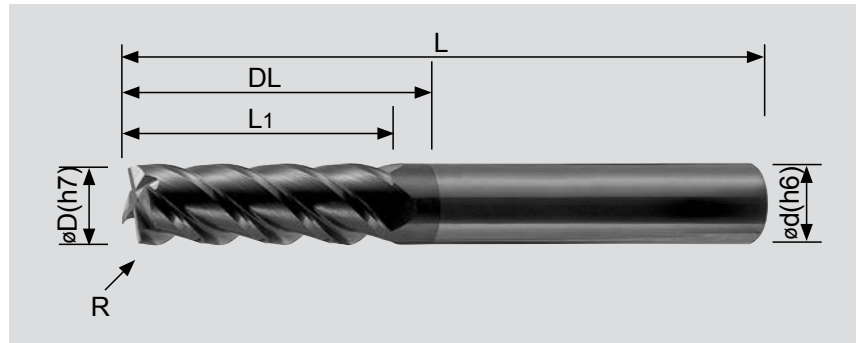

單位/Unit : mm

型號 EDP NO.	刃徑 D Flute Dia.	R徑 Radius	刃長 L1 Length of Cut	全長 L Overall Length	DL Effective Length	柄徑 d Shank Diameter	刃數 Flute Number	AK45	AK925
64ECR-D3.0L50R0.3	3.0	R 0.3	6.0	50	8	6.0	4	●	●
64ECR-D3.0L50R0.5	3.0	R 0.5	6.0	50	8	6.0	4	●	●
64ECR-D4.0L50R0.5	4.0	R 0.5	8.0	50	10	6.0	4	●	●
64ECR-D4.0L50R1.0	4.0	R 1.0	8.0	50	10	6.0	4	●	●
64ECR-D5.0L50R0.5	5.0	R 0.5	8.0	50	12	6.0	4	●	●
64ECR-D5.0L50R1.0	5.0	R 1.0	8.0	50	12	6.0	4	●	●
64ECR-D6.0L50R0.5	6.0	R 0.5	8.0	50	12	6.0	4	●	●
64ECR-D6.0L50R1.0	6.0	R 1.0	8.0	50	12	6.0	4	●	●
64ECR-D8.0L63R0.5	8.0	R 0.5	10.0	63	15	8.0	4	●	●
64ECR-D8.0L63R1.0	8.0	R 1.0	10.0	63	15	8.0	4	●	●
64ECR-D10.0L75R0.5	10.0	R 0.5	12.0	75	20	10.0	4	●	●
64ECR-D10.0L75R1.0	10.0	R 1.0	12.0	75	20	10.0	4	●	●
64ECR-D12.0L75R0.5	12.0	R 0.5	15.0	75	20	12.0	4	●	●
64ECR-D12.0L75R1.0	12.0	R 1.0	15.0	75	20	12.0	4	●	●
64ECR-D4.0L75R0.5	4.0	R 0.5	8.0	75	10	6.0	4	●	●
64ECR-D4.0L75R1.0	4.0	R 1.0	8.0	75	10	6.0	4	●	●
64ECR-D5.0L75R0.5	5.0	R 0.5	8.0	75	12	6.0	4	●	●
64ECR-D5.0L75R1.0	5.0	R 1.0	8.0	75	12	6.0	4	●	●
64ECR-D6.0L100R0.5	6.0	R 0.5	8.0	100	12	6.0	4	●	●
64ECR-D6.0L100R1.0	6.0	R 1.0	8.0	100	12	6.0	4	●	●
64ECR-D8.0L100R0.5	8.0	R 0.5	10.0	100	15	8.0	4	●	●
64ECR-D8.0L100R1.0	8.0	R 1.0	10.0	100	15	8.0	4	●	●
64ECR-D10.0L100R0.5	10.0	R 0.5	12.0	100	20	10.0	4	●	●
64ECR-D10.0L100R1.0	10.0	R 1.0	12.0	100	20	10.0	4	●	●
64ECR-D12.0L100R0.5	12.0	R 0.5	15.0	100	20	12.0	4	●	●
64ECR-D12.0L100R1.0	12.0	R 1.0	15.0	100	20	12.0	4	●	●

註：有●者表示有庫存
NOTE: ● means items in stock

切削條件表請參考第90頁